



THE SEAL OF ASSET INTEGRITY

Soft Cuts- GL43



Alba GL43 is a premium grade of compressed fibre sheet material based on glass fibre, aramid fibre, inorganic fillers, and a high quality nitrile binder.

Designed with safety in mind, its manufactured and tested to the highest industry standards. Fire safe (to API 607) and conforming to British Standard BS7532 Grade X, it seals tighter and performs to a higher level than conventional CNAF materials.

AVAILABILITY

Thickness: 0.3mm to 3.0mm


Sheet Size: 1500mm X 1500mm

Approvals: BS7531 Grade X, WRAS, DIN-DVGW DIN 3535-6, DVGW VP 401, DVGW KTW, BAM (Oxygen), TA-Luft (VDI 2440), API 607, Germanischer Lloyd, EC 1935/2004,

Colour: white

APPLICATION

Alba GL-43 is a superior performance fire safe material meeting the requirements of BS 7531 Grade X and with outstanding mechanical properties. It is suitable for many fluids including hydrocarbons, steam, gases, dilute acids and alkalis.

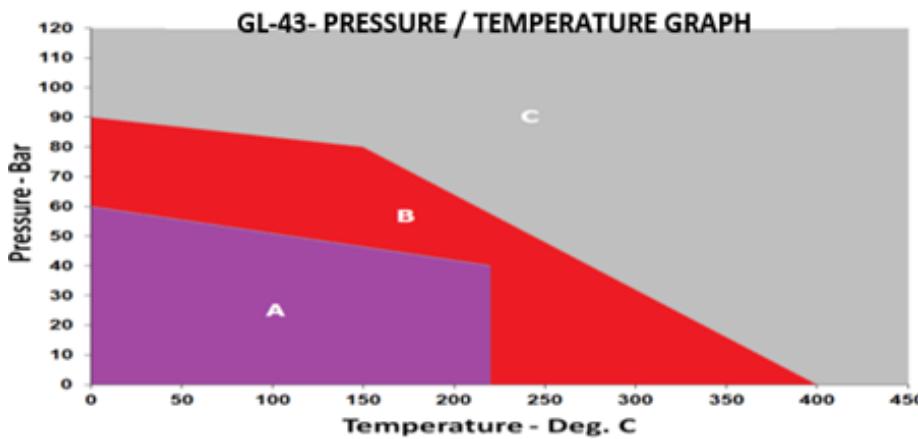

As the companies products are used in multiple applications and as the company has no control over the method of their use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise. Any technical cooperation is given for customers assistance only and without liability on the part of the company.



Block 1, Units 9-12, Souterhead Industrial Estate, Altens, Aberdeen, United Kingdom AB12 3LF

T:01224 249414 E: sales@albagaskets.co.uk

www.albagaskets.com



OHS621780 FS 544395 EMS621779