


Gator Skillet- Using the Skillet



Note: Care must be used at all times to protect the sealing surfaces of the gasket. Flange Skillet International, LLC assumes no liability for any damages which may result from the use of our product. User assumes all risks.

STEP 1 Install the flange studs and nuts in the lower half of the flange

STEP 2 Rest the Gator Skillet/gasket assembly on the installed studs within the flange

STEP 3 Remove the center "safety" tie first. Since the Gator is self-aligning the gasket will sit properly in the ring groove

STEP 4 Remove the outside "safety" tie

STEP 5 Draw the flanges together to secure the edges of the gaskets within the ring groove

STEP 6 Open the Gator towards the hinge (Figure 1)

STEP 7 Rotate the Gator around the secured gasket. (Figure 2) Lift the Gator to remove it from the flange assembly. (Figure 3)

STEP 8 Continue with the installation of the remaining studs and nuts

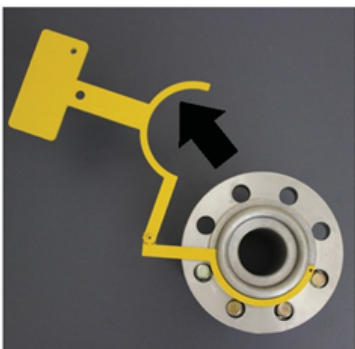


Figure 1



Figure 2

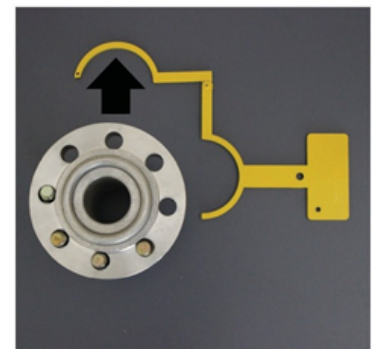


Figure 3