



Half Skillet- Unpacking/Rigging Instructions




Note: Care must be used at all times to protect the sealing surfaces of the gasket. Flange Skillets International, LLC assumes no liability for any damages which may result from the use of our product. User assumes all risks.

Step 1- Remove the shipping tie

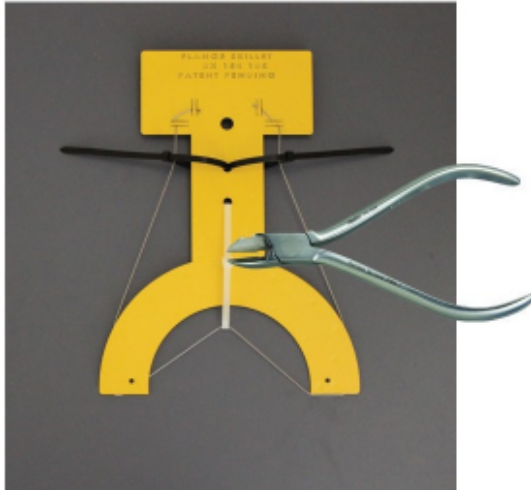

Step 2- Place the skillet on the gasket (centered)

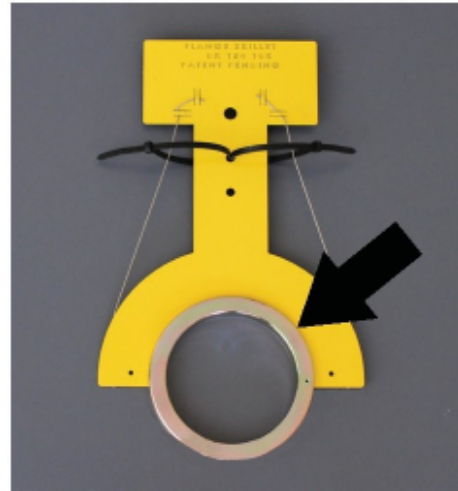

Step 3- Install the retaining wire around gasket (centered)



Step 4- Pull the "tensioning" ties to tighten the retaining wire



Step 5- Install the "safety" tie

