




Note: Care must be used at all times to protect the sealing surfaces of the gasket. Flange Skillet International, LLC assumes no liability for any damages which may result from the use of our product. User assumes all risks.

STEP 1 Install the flange studs and nuts in the lower half of the flange

STEP 2 Remove the "safety" tie. Inventory

STEP 3 Push the supplied threaded rod through the depth gauge hole. (Figure 1)

STEP 4 Lower the Flange Skillet/ gasket assembly until the depth gauge rod rests on the top of the flange.

STEP 5 Draw the flanges together to secure the edges of the gaskets within the ring groove

STEP 6 Inspect to confirm that the gasket is properly seated in the ring groove

STEP 7 Cut one side of the exposed retaining wire. (Figure 2) Pull the wire of the assembly.

STEP 8 Remove the Flange Skillet from the flange. Continue with the installation of the remaining studs and nuts.

Figure 1

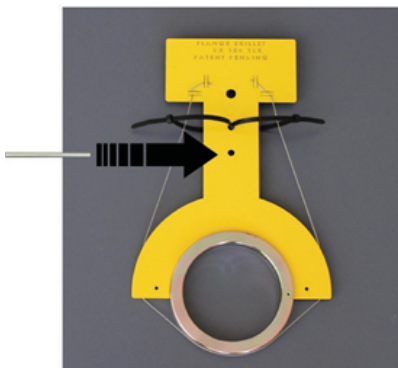


Figure 2

