
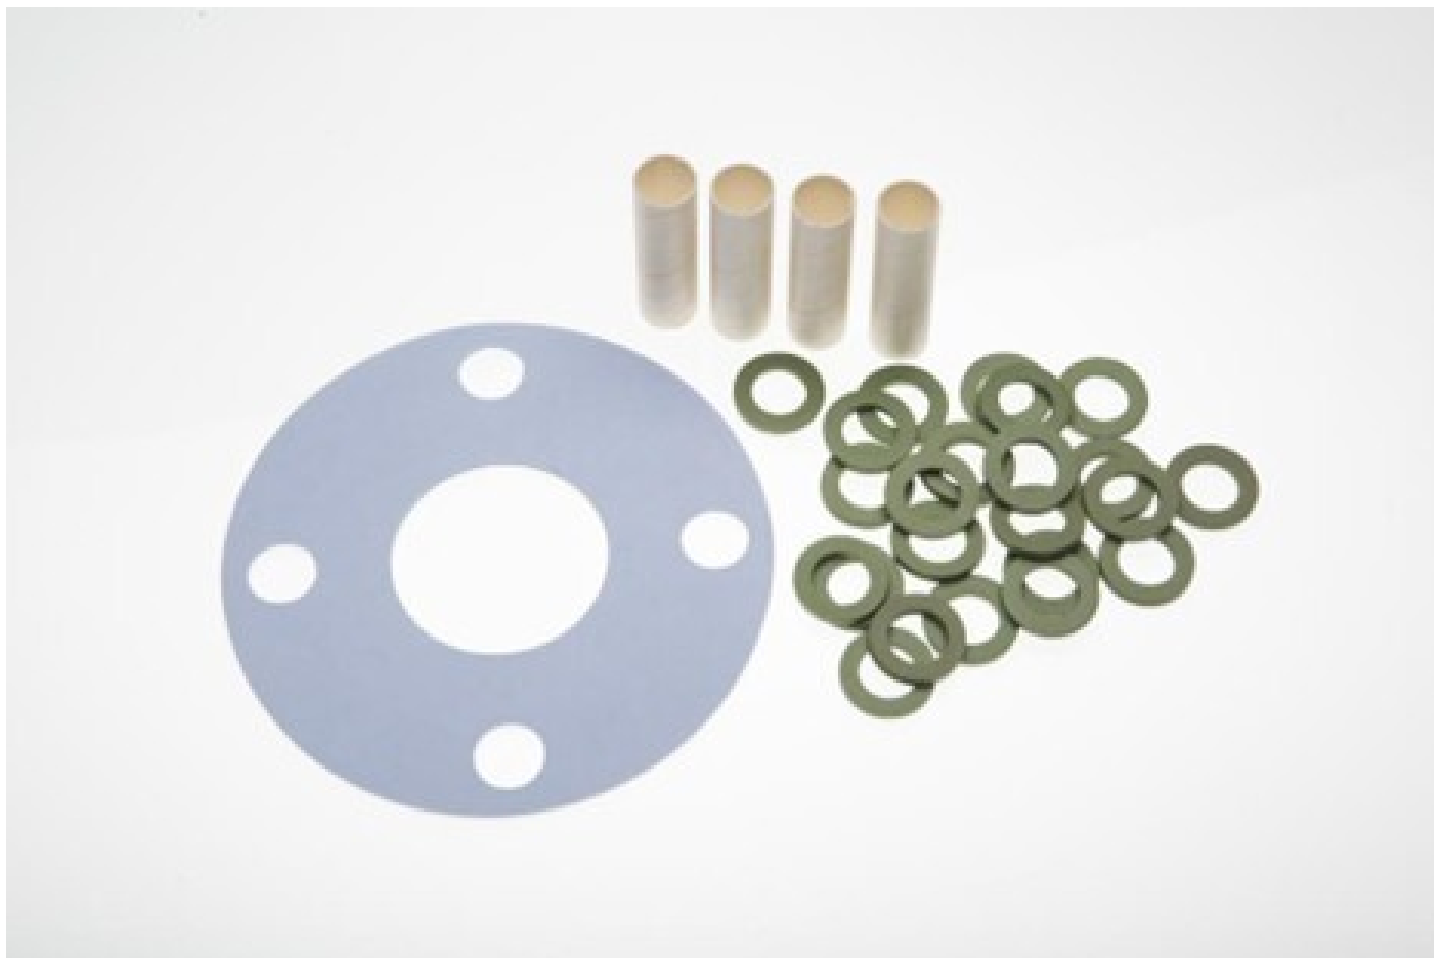


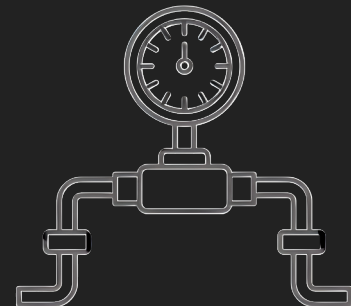

The Alba IsoShield Blue™ Isolation kit is designed to be used on non fire safe low pressure flange configurations, especially in areas where only low bolt loads are available or where there may be imperfect flange conditions. The IsoShield Blue™ is supplied with a 3mm thick modified PTFE gasket along with Nomex Isolation sleeves and Alba-HC washers and has been successfully used in Global energy markets since 2015.

APPLICATIONS

- Suited to ANSI 150 and 300lb flanges.
- Low bolt load flange/gasket interfaces
- Imperfect flange conditions - where GRE is unsuitable
- Usable in wide range of temperatures from -196c to +260c
- Cunifer, glass flaked lines and other low bolting flanges